



## Camera Module


# ACE-HENS342-iL

- 1080p(1920x1080)@30(25)fps
- Low Volatage LVDS Input
- H.264 High/Main Profiles
- 12VDC / PoE(Optional)

# ACE-HENS342-iL



## • Dimensions

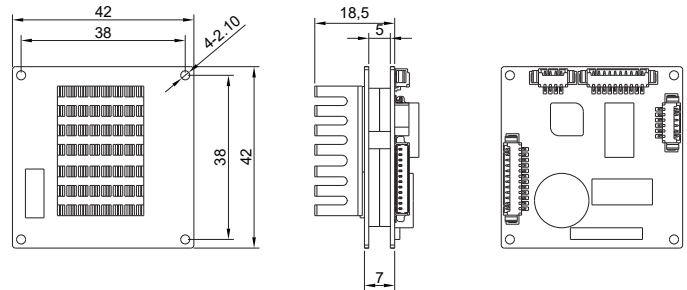

## Specifications

### • Video

Video Output	Network	Network
	Analog	CVBS(720H)

### • Functions

Motion Detection		4 Zones
Privacy Masking Zone		-
Alarm	Alarm In/Out	1CH sensor in / 1CH out
	Alarm Triggers	Sensor, Motion
	Alarm Events	FTP, E-mail Notification

### • Network

Ethernet		10/100 Base-T LAN
Video Compression Format		H.264 High Profile, MJPEG
Video Resolution		1920x1080, 1280x1024, 1280x720, 720x480, 704x480, 640x480, 640x352, 320x240
Max. Frame Rate		First: 1080p 30(25)fps (H.264, MJPEG) Second : 720x480 30(25)fps (H.264, MJPEG) Third : 320x240 30(25)fps (H.264, MJPEG)
Streaming Capability		Multiple Streaming(Up to 2 Profiles)
Streaming Method		Unicast, Multicast
Bitrate Control		H.264 : CBR, VBR, AVBR
Max.User Access		16 clients
Audio	Audio In/Out	1CH Audio in / 1CH Audio out
	Compression Format	G.711 Codec
	Communication	2way
IP		IPv4
Protocol		HTTP, HTTPS, FTP, SMTP, UPnP, DNS, DDNS, RTP/RTSP, TCP/IP, UDP, DHCP, SNMP, Zeroconf, TELNET, RARP, PPPoE, PAP, CHAP, NTP
Security		-
Web Viewer	Web browser	Internet Explorer
	Language	Korean, English
SW Integration API		Onvif (Profile S)

### • Physical and Environmental

Dimension(mm)	42X42mm
Weight	Approx.22g
Operating Temperature	-10°C~+50°C

### • General

Supply Voltage	12VDC(±10%)
Power Consumption	12VDC(Max.200mA)

### • Option

Supply Voltage	PoE(IEEE802.3af)
Power Consumption	Max.3.6W